

Solid polymer Electrolytic Dehumidifier

ROSAHL

Product Specification

Model : RDHC - 10J2

RYOSAI TECHNICA CO., LTD.

RB-PS12015

1. Application

This specification document is applied to model RDHC-10J2 of solid polymer electrolytic dehumidifier "ROSAHL".

2. Outline

Drawing No : RB-RBOX0006 (Refer to page 4)

3. Specification

- 1). Input voltage : AC 100V (AC 90~110V)
- 2). Operating temperature : -10~50°C
- 3). Operating humidity : 90%RH and below
- 4). Dehumidifying capacity before shipment : 58 g/day (at 30°C, 60%RH)
- 5). Annual average power consumption : 20W (at 20°C, 65%RH)
- 6). Dielectric strength : AC 2000V (1 min.)
- 7). Applicable volume : ~8.0m³
- 8). Humidity set range : 20~80%RH
- 9). Weight : 2.1kg

4. Delivery Inspection

Tested the following inspection items.

- 1). Appearance
- 2). Element terminal voltage
- 3). Dehumidifying capacity
- 4). Humidity Controller Check
- 5). Nameplate
- 6). Packaging

5. Packaging

The products are packed individually and fill the box with them to avoid breakage failure while transport.

6. Accessory


- 1). Instruction manual 1 piece

7. Precautions for Use of Dehumidifier

- 1). Check the installation direction carefully before installation. Installing in the opposite direction will reverse dehumidification and humidification, which may result in an adverse effect on the contents in the container.
- 2). The container must have a sealed structure. If the container is made of moisture-permeable material, the results may not be satisfactory.
- 3). It is preferable that the product is installed in the center of the inner side surface of the container. (Do not install on the top or bottom surface)
- 4). If there is rubber packing or a similar material that contains an antioxidant, crystalline substances may form on the element. Careful evaluation of material is necessary when selecting a packing.
- 5). Sealing agents should not be silicon-based to make a container airtight.
(Silicon-based sealing agents generate oxime gas and siloxane gas during hardening, which quickly degrades the performance of the dehumidifying element.)
Consult us if any questions.

- 6). Do not expose the moisture discharging hole to water. When using outdoors, be sure to attach a rainproof cover with anti-insect net (perforated metal) (optional) to protect from water or insects.
- 7). Keep the moisture discharging side unsealed and well ventilated.
- 8). DO NOT use with vapor phase corrosion inhibitor or insect repellent. DO NOT use in an environment with a lot of organic gas.
- 9). Consult us if there is dust or oil mist in the environment where the product will be used.
- 10). DO NOT attempt to disassemble, repair or modify the product, as this may damage it.

(4/4)

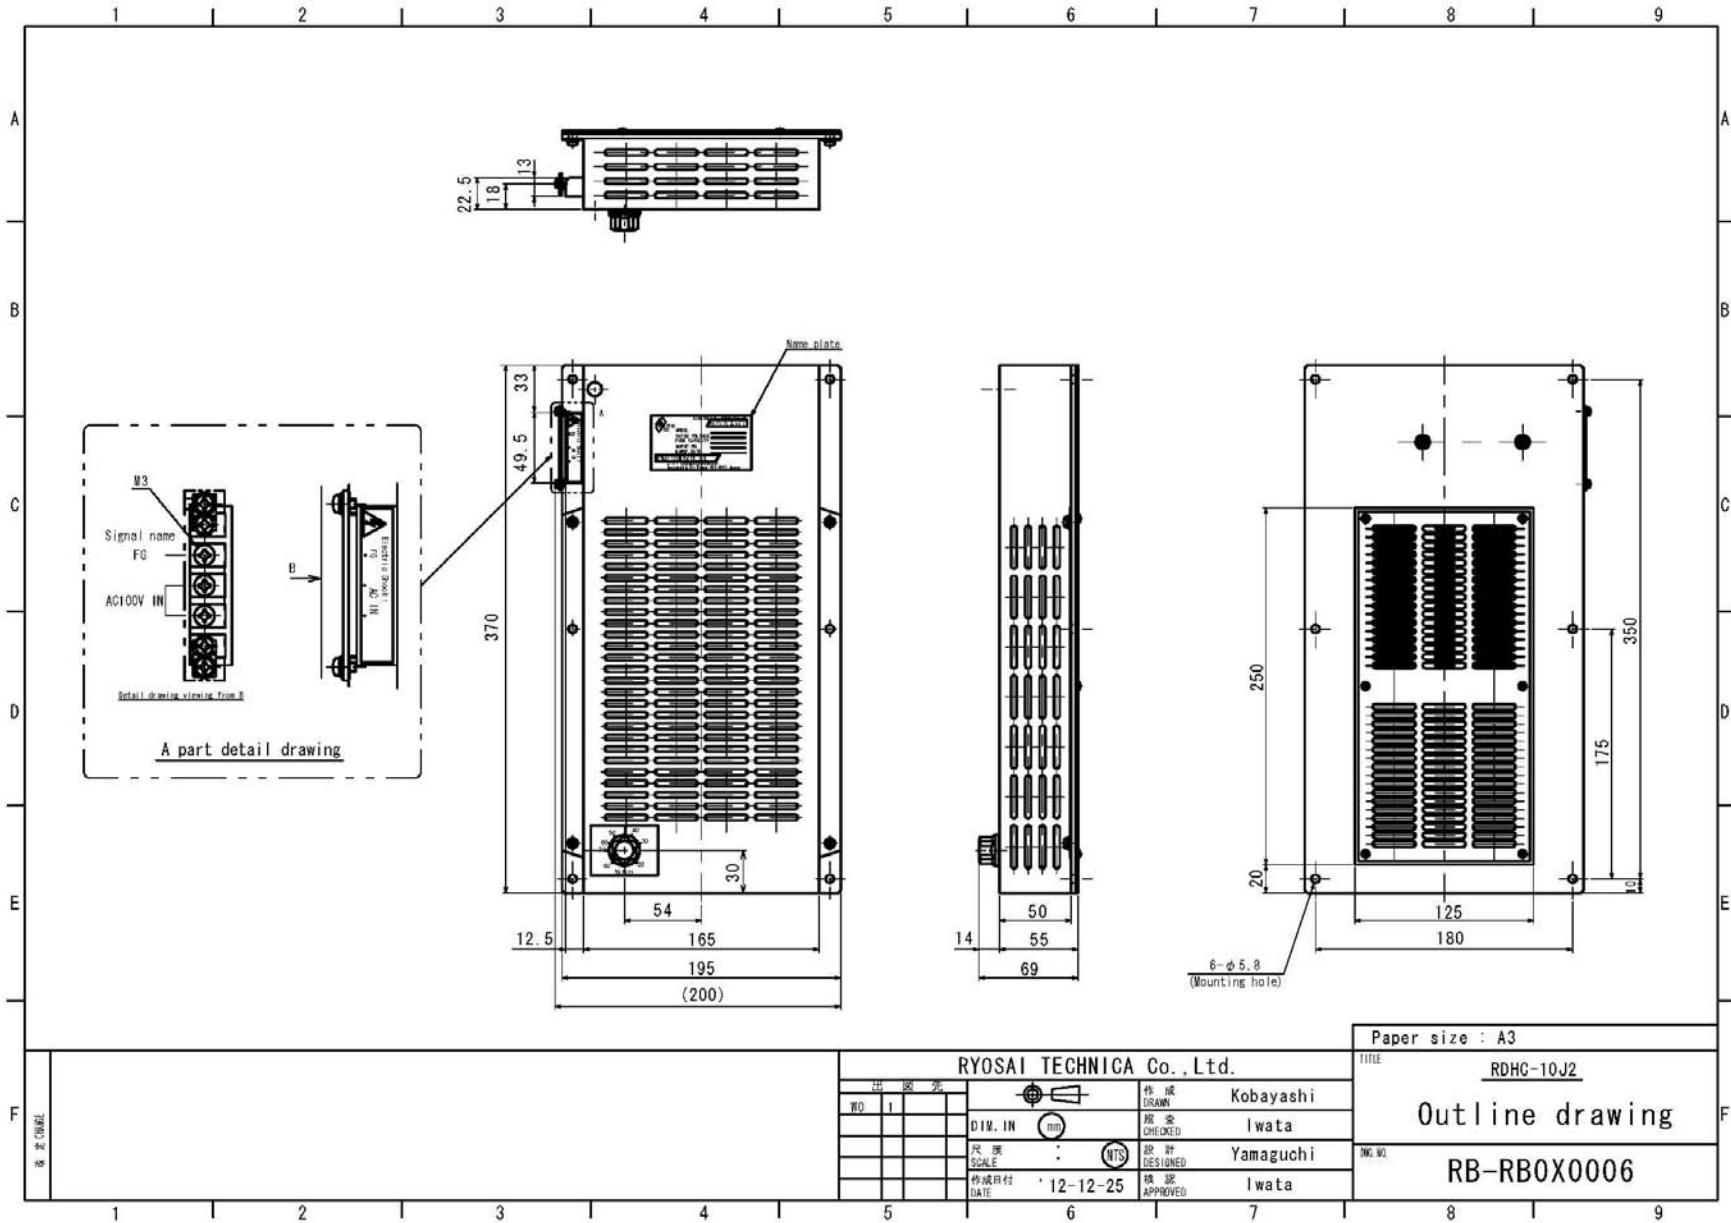

Paper size : A3	
TITLE	RDHC-10J2
Outline drawing	
FIG. NO.	RB-RBOX0006

RYOSAI TECHNICA Co., Ltd.	
作成 DRAWN	Kobayashi
検査 CHECKED	Iwata
設計 DESIGNED	Yamaguchi
承認 APPROVED	Iwata
DATE	12-12-25
尺規 SCALE	NTS
作図 DRAWING	
NO.	1

出 図 先	
NO.	1
尺規	NTS
作図	
NO.	