


Typical Rosahl Installation



- 1) Rosahl is designed to operate in a sealed cabinet
- 2) Attach the dehumidifier vertically to the centre of the cabinet's side wall (do not attach it to the top or bottom of the cabinet).
- 3) When using in an outdoor panel, attach a rain cover and insect-proof net to protect the membrane.
- 4) Avoid using Rosahl where the humidity generation side (cathode) faces a sealed or poorly ventilated space.
- 5) Avoid using Rosahl in the presence of volatile anti-corrosion agents or concentrated organic gases are present.
- 6) Use non-silicon agents if necessary to seal the cabinet
- 7) Disassembly, repair or reconfigure of the product may lead to failure.
- 8) If used near fine particles or oil mist, refer to your supplier.

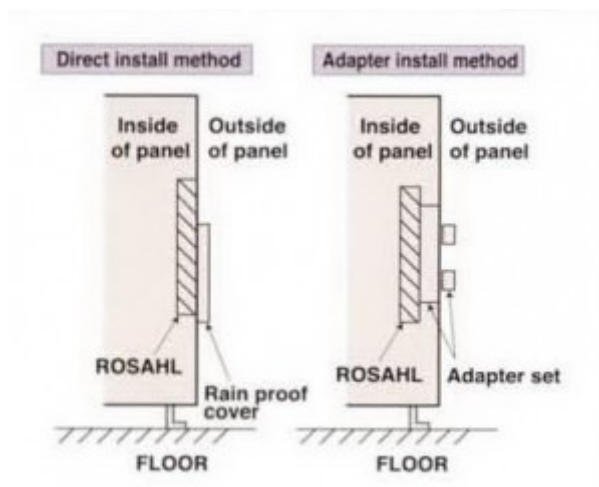

Cabinet mounting guide for Rosahl